


Installation of Gateway via mobile data




- (1) AccessPoint
- (2) Power supply
- (3) Raspberry Pi
- (4) Encapsulation
- (5) Mobile data dongle
- (6) USB to Micro USB
- (7) SD card

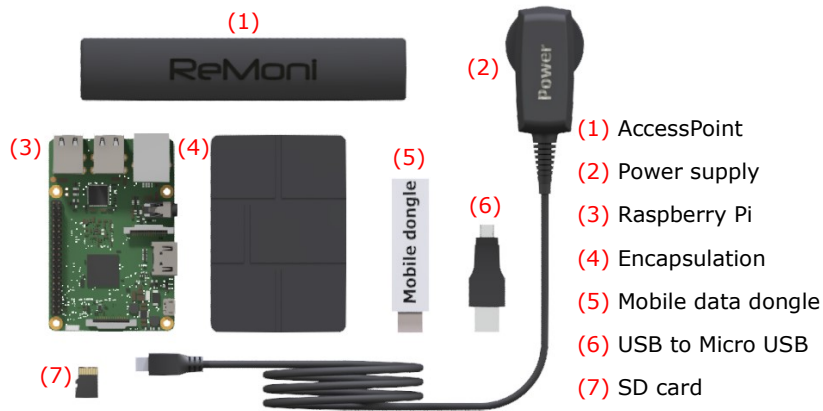

2. Registration of the Gateway is optional. Locate the AccessPoint ID on the unit. Seen in red above. Log in to ReCalc.ReMoni.com and register the unit.


1. Make sure you have everything in the picture.



3. The Gateway can be mounted using the holes in the case. See the mount distance above.



4. Assemble the Raspberry PI with the case.

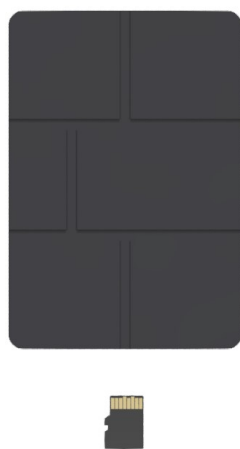

5. Insert the SD card into the Raspberry Pi.



6. Connect the AccessPoint to the Raspberry Pi with the USB to Micro USB adaptor.



Installation of Gateway via mobile data



7. Connect the mobile data dongle to the Raspberry Pi. The data dongle is connected to the USB connector behind the AccessPoint. Can also be connected via LAN or WiFi. See *"Installation of Gateway via LAN"* & *"Installation of Gateway via WiFi"*

8. Connect the power supply to the Raspberry Pi.



9. If the green LED in the Raspberry Pi, is blinking green, then the installation is done. If it is not blinking green, cut the power, wait 10 sec. and turn it on again. If the mobile dongle LED is not lighting blue, take the dongle out wait for 10 sec. and insert it again. When the mobile dongle is lighting blue, the installation is complete.

OBS. The best signal is obtained during installation a minimum of 1 meter from the ground.