


Installation of Gateway via WiFi




- (1) AccessPoint
- (2) Power supply
- (3) Raspberry Pi
- (4) Encapsulation
- (5) USB to Micro-USB
- (6) SD card

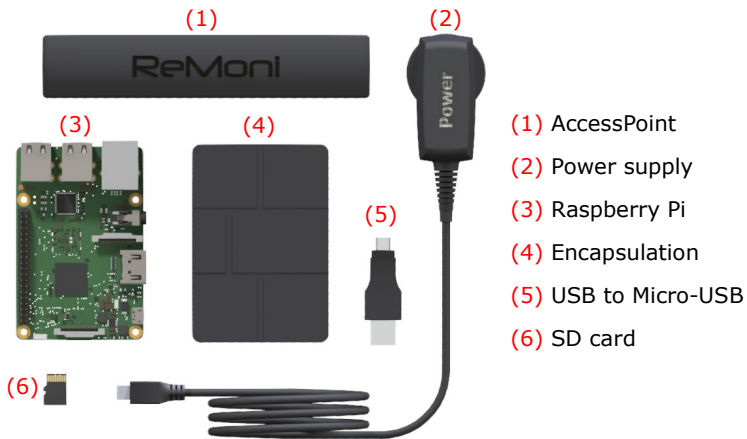

2. Registration of the Gateway is optional. Locate the AccessPoint ID on the unit. Seen in red above. Log in to ReCalc.ReMoni.com and register the unit.


1. Make sure you have everything in the picture.



3. The Gateway can be mounted using the holes in the case. See the mount distance above.



4. Assemble the Raspberry PI with the case.

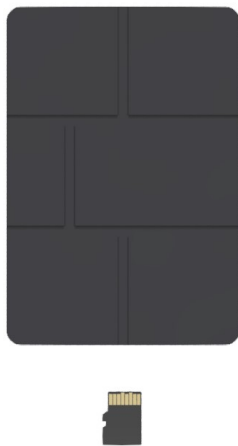

5. Insert the SD card into the Raspberry Pi.



6. Connect the AccessPoint to the Raspberry Pi with the USB to Micro USB adaptor.



Installation of Gateway via WiFi



7. Connect the power supply to the Raspberry Pi.



8. The Gateway is now installed. When the Gateway is plugged in, it will create a network with the SSID "ReMoni Gateway". Use a PC to connect to this network and use a browser to enter <https://recalc.remoni.com/>. The browser will redirect you to the setup page. Here you can choose which internet the gateway shall be connected to. Now enter the WiFi password.

Can also be connected via LAN or mobile data.

See "*Installation of Gateway via LAN*" & "*Installation of Gateway via mobile data*".

OBS. The best signal is obtained during installation a minimum of 1 meter from the ground.